




# Fuse Terminal Blocks



Fuse blocks are available for 1/4", 5 mm, Class CC and midget size fuses, either with or without a blown fuse LED. LED fuse blocks are polarity sensitive. The hinge side is positive.

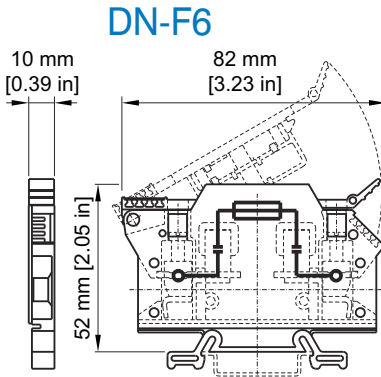

**DN-F6**

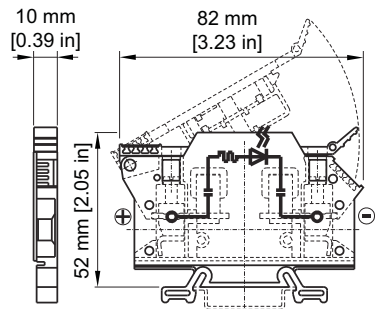

**DN-F6L**

	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg	Part #	Pcs/Pkg	Price/Pkg
<b>Gray Term Blk</b>	DN-F6	25	<-->	-	-	-	DN-F10	50	<-->	-	-	-
<b>12-24VAC/DC*</b>	-	-	-	DN-F6L24	10	<-->	-	-	-	DN-F10L24	10	<-->
<b>110VAC/DC*</b>	-	-	-	DN-F6L110	10	<-->	-	-	-	DN-F10L110	10	<-->
<b>220VAC/DC*</b>	-	-	-	DN-F6L220	10	<-->	-	-	-	DN-F10L220	10	<-->

**Fuse Terminal Blocks Specifications**


<b>UL Approval**</b>	600V 30A 20-6 AWG	600V 30A 20-6 AWG	300V 15A 24-10 AWG	300V 15A 24-10 AWG
<b>CSA Approval</b>	600V 30A 18-6 AWG	600V 30A 18-6 AWG	300V 8A 18-12 AWG	300V 8A 18-12 AWG
<b>VDE Approval</b>	750V 8A -	750V 8A -	500V 8A 4mm <sup>2</sup>	500V 8A 4mm <sup>2</sup>
<b>CE Conformity</b>	CE 23/20, CE 23/21	CE 23/20, CE 23/21	CE 23/20, CE 23/21	CE 23/20, CE 23/21
<b>Agency File#</b>	E179129, LR84816	E179129, LR84816	E179129, LR84816	E179129, LR84816
<b>Wire Strip Length</b>	0.47" (12mm)	0.47" (12mm)	0.39" (10mm)	0.39" (10mm)
<b>Tightening Torque</b>	18.0 lb-in (2.0Nm)	18.0 lb-in (2.0Nm)	5.5 lb-in (0.6Nm)	5.5 lb-in (0.6Nm)
<b>Density</b>	30 pcs./ft. (100/m)	30 pcs./ft. (100/m)	30 pcs./ft. (100/m)	30 pcs./ft. (100/m)
<b>Fuse Size (not supplied)</b>	1 1/4" X 1/4"	1 1/4" X 1/4"	5x20mm-5x25mm	5x20mm-5x25mm
<b>Indicator Type</b>	Non-indicating	LED blown fuse indicator	Non-indicating	LED blown fuse indicator
<b>Operating Temperature</b>	Ambient air temperature: -13°F to 104°F (-25°C to 40°C) Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C)			
<b>Notes:</b>	* Working voltage      ** For copper wire only			

**Accessories**

	Part#	Pcs/Pkg	Price/Pkg
<b>35 mm DIN Rail</b>	Part No. DN-R35S1 (7.5 mm) or DN-R35HS1 (15 mm)		various
<b>End Bracket</b>	DN-EB35	50	<-->
	DN-EB35MN	20	<-->
	DN-EB35-A	50	<-->
	DN-QEB35	50	<-->
<b>End Cover</b>	Included	-	-
<b>Marking Tags</b>	DN-L*/DN-LT** series	500/100	various
<b>Angled Support Bracket</b>	DN-ASB1	50	<-->
<b>Notes:</b>	* On lever arm      ** On Terminal body		

Note: DN-F6 series fuse holders will accommodate the following AutomationDirect fuses: ABC, AGC, MDA and MDL.

DN-F10 series fuse holders will accommodate the following AutomationDirect fuses: GMA, GMC, S500, and S506.

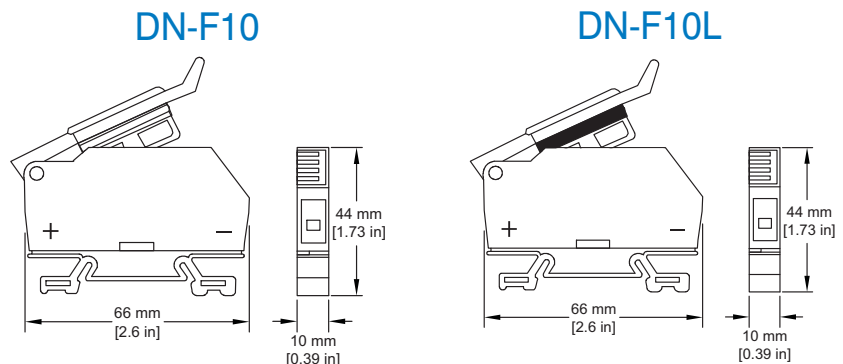

For more information on accessories, see the "DINnectors Accessories" section of this chapter.